



DATASHEET


SOLARSPEED 4.0

EAST-WEST LANDSCAPE

060826.ENG


SOLARSPEED

ADVANTAGES

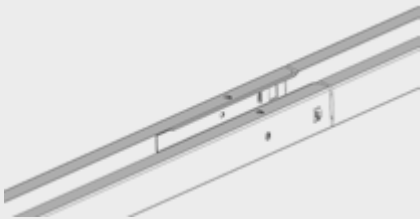

✓ **click system**

Basic units can be connected by a click system, which ensures good alignment and quick installation.

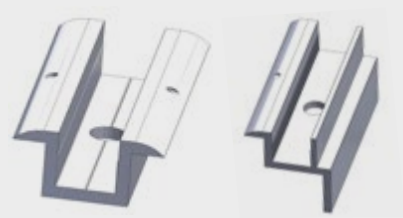

✓ **clamps**

The clamps are fastened onto the top profiles with M8 bolts for a reliable connection of your module.



✓ **semi-assembled triangles**

Working with semi-assembled triangles not only saves on installation time, but also drastically reduces the number of individual parts on the roof!




✓ **made of zinc-magnesium steel**

Perfect for applications with long-term corrosion resistance requirements. Self-healing properties and good electrical conductivity.



✓ **inversed layout**

Improved aerodynamics resulting in a lightweight solution and improved accessibility beneath modules.

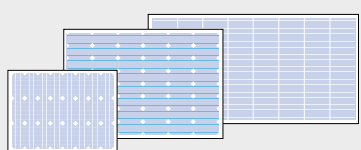


✓ **large modules**

Ideal for new generations of large modules.

SOLARSPEED

COMPONENTS

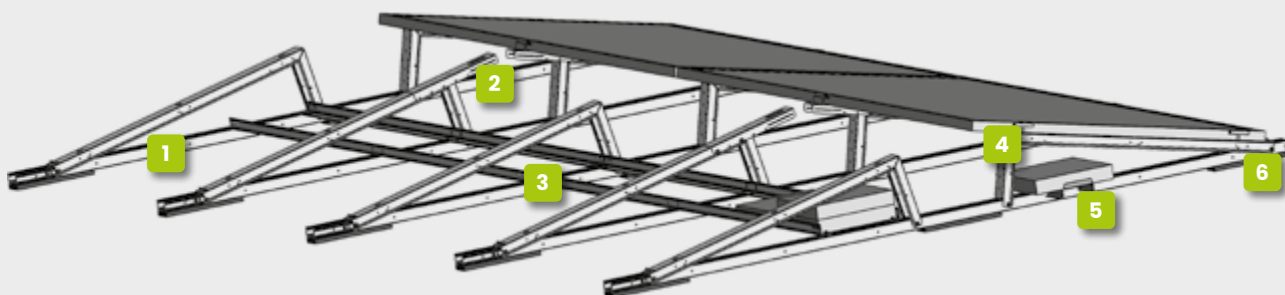

STANDARD COMPONENTS

- 1** basic unit
 - semi-assembled triangles
 - rail
 - protective rubbers*
- 2** bracket + extension piece for mid support
- 3** set of L-profiles + centre piece
- 4** clamps + M8 bolts
- 5** ballast support
- 6** end rubber

FOOTING SYSTEMS

- concrete footing (12kg) + hammer plug
- PP footing
- omega bracket

For PVC roofs use rubber with aluminium underlay.

ADDITIONAL COMPONENTS

- ridge connection
- anchor profile
- C-rail end reinforcement
- centre piece for set of L-profiles


PROVIDED BY INSTALLER

- ballast tiles
- lightning connection
- earthing connection
- solar module



SolarSpeed on concrete footing


- Easy to assemble by means of hammer plugs.
- Concrete footing also serves as ballast.
- Very good drainage due to increased space under the profiles.
- Ideal for pebbled and green roofs. Far fewer pebbles have to be removed compared to traditional frames.

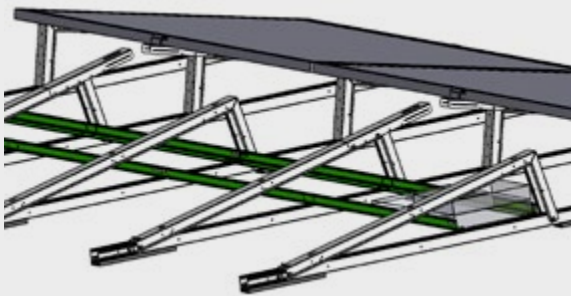

SolarSpeed ballast supply

with sets of L-profiles

- The sets of L-profiles are used to place ballast under the modules and also serve as extra reinforcement of the frame.
- The extra connection between the basic units makes the installation even stronger.

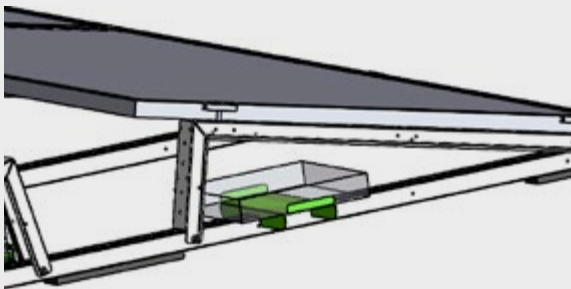

with ballast supports

- Ballast supports can be placed on the inside of the installation.
- The ballast support can be quickly and easily slid over the rail of the basic unit.

ballast with online tool


online calculator

- With our free online software, you can work out your projects very quickly and easily!
- Define the location and environment, make a sketch of the roof, choose the modules and the mounting frame and after drawing up the PV installation, our software calculates the correct ballast plan.
- All information regarding roof loads, mounting structure and placement are included in a clear report, as well as a complete bill of materials.

tested and approved

- When developing our mounting frames, the most recent applicable standards and guidelines are always taken into account.
- These frames have undergone wind tunnel testing and the results have been incorporated into our calculations. In this way, we can present a complete technical file when elaborating your project.

dimensions and angles

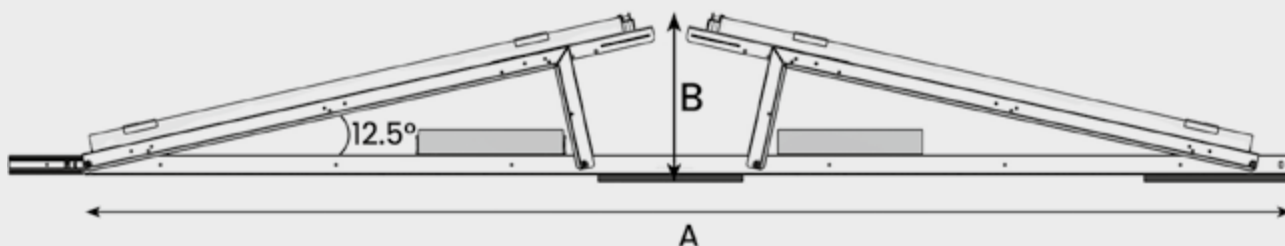

Panel Width	Pitch (A)	Height (B)
960 – 1060 MM	2350 MM	300 – 320 MM
1061 – 1140 MM	2500 MM	320 – 340 MM
1141 – 1230 MM	2700 MM	340 – 360 MM
1231 – 1320 MM	2850 MM	360 – 380 MM

Other pitches are available on request.