




**avasco
solar**



**excelling in
solar support**


Our products landscape installation

SolarSpeed East-West

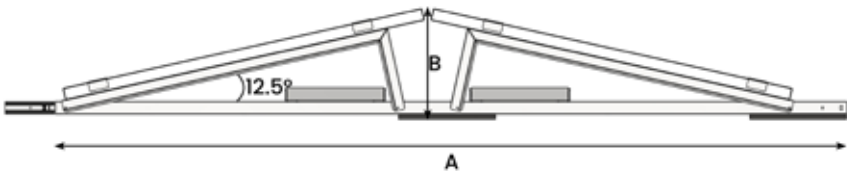

Panel Width	Pitch (A)	Height (B)
950 - 1055 MM	2300 MM	300 - 320 MM
1056 - 1100 MM	2350 MM	320 - 330 MM
1101 - 1140 MM	2450 MM	330 - 340 MM
1141 - 1250 MM	2600 MM	340 - 355 MM

SolarSpeed South

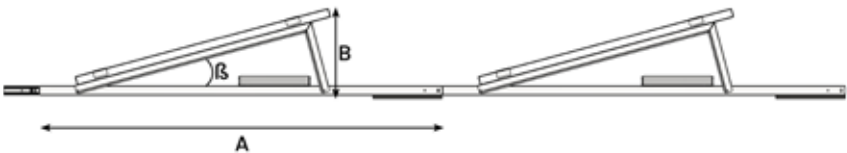


Panel Width	Pitch (A)	Height (B)
950 - 1310 MM · $\beta = 10,0^\circ$	1500 MM	250 - 275 MM
950 - 1310 MM · $\beta = 12,5^\circ$	1600 MM	285 - 320 MM
950 - 1310 MM · $\beta = 15,0^\circ$	1750 MM	325 - 365 MM

Advantages

- Very quick assembly
- Pre-assembled basic unit
- Revolutionary click system
- Minimal packaging waste


Our products portrait installation

SolarSpeed East-West

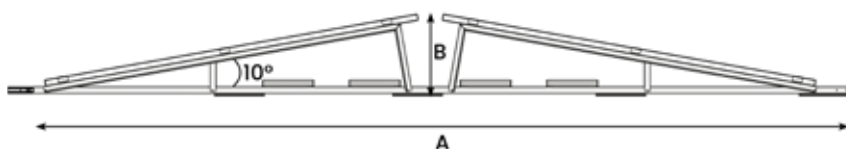

Panel Length	Pitch (A)	Height (B)
2000 - 2060 MM	4400 MM	440 - 450 MM
2061 - 2115 MM	4500 MM	450 - 460 MM
2116 - 2160 MM	4600 MM	460 - 470 MM
2161 - 2230 MM	4750 MM	470 - 483 MM
2231 - 2300 MM	4900 MM	483 - 495 MM
2301 - 2385 MM	5000 MM	495 - 505 MM

SolarSpeed South

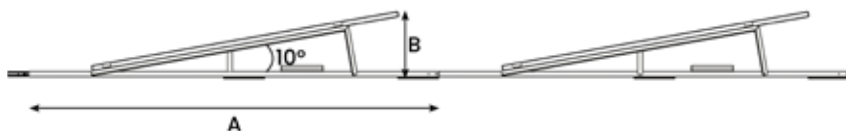

Panel Length	Pitch (A)	Height (B)
1640 - 1899 MM	2500 MM	380 - 425 MM
1900 - 2159 MM	3000 MM	425 - 470 MM
2160 - 2385 MM	3500 MM	470 - 505 MM

- Ideal for the new generation of XXL panels
- Solid installation due to additional local reinforcements
- Possibility of using 6 clamps per panel
- Precise alignment thanks to angled profiles

New in our product range



SolarSpeed East-West 4.0

- The landscape solution for the new generation of XXL panels
- Optimal walking space to facilitate maintenance and cable management
- Efficient tightening on the short and long sides of the panel

Panel Width	Pitch (A)	Height (B)
960 - 1060 MM	2350 MM	300 - 320 MM
1061 - 1140 MM	2500 MM	320 - 340 MM
1141 - 1230 MM	2700 MM	340 - 360 MM
1231 - 1320 MM	2850 MM	360 - 380 MM

Cable management accessories

- Cables protected at the most critical places
- Compatible with all SolarSpeed versions
- UV-resistant





SolarSpeed ballast solutions



Ballast supports



Sets of L-profiles

Types of supports



Rubber (+ alu)



Concrete footing + anchor



PP-footing

Online calculator

Design your own project with our free software and immediately download the list of materials and the ballast ratio.





**avasco
solar**



- ✓ **Solution for all panel sizes**
- ✓ **Short delivery time due to advanced production facility**
- ✓ **Limited number of components on the worksite**
- ✓ **Custom-tailored development of each project**
- ✓ **Manufactured from zinc-magnesium steel**
- ✓ **100 % Belgian production**



AVASCO SOLAR nv/sa
Rodenbachstraat 53
B-8908 Vlamertinge
Belgium

T +32 (0)57 27 15 00
VAT BE 0721.474.320
info@avasco-solar.be
www.avasco-solar.be

**excelling in
solar support**